

### Key features


- Ultra compact
- Based on TFF and free-space technology
- Ultra low insertion
- Stable at all operating temperatures
- All fibers from the same side of the device

### Applications

- Up to 18 channels that could be integrated directly into CWDM transceivers, line-card, portable CWDM testing equipment, or used as stand-alone modules for multiplexing and demultiplexing



## Dimensions

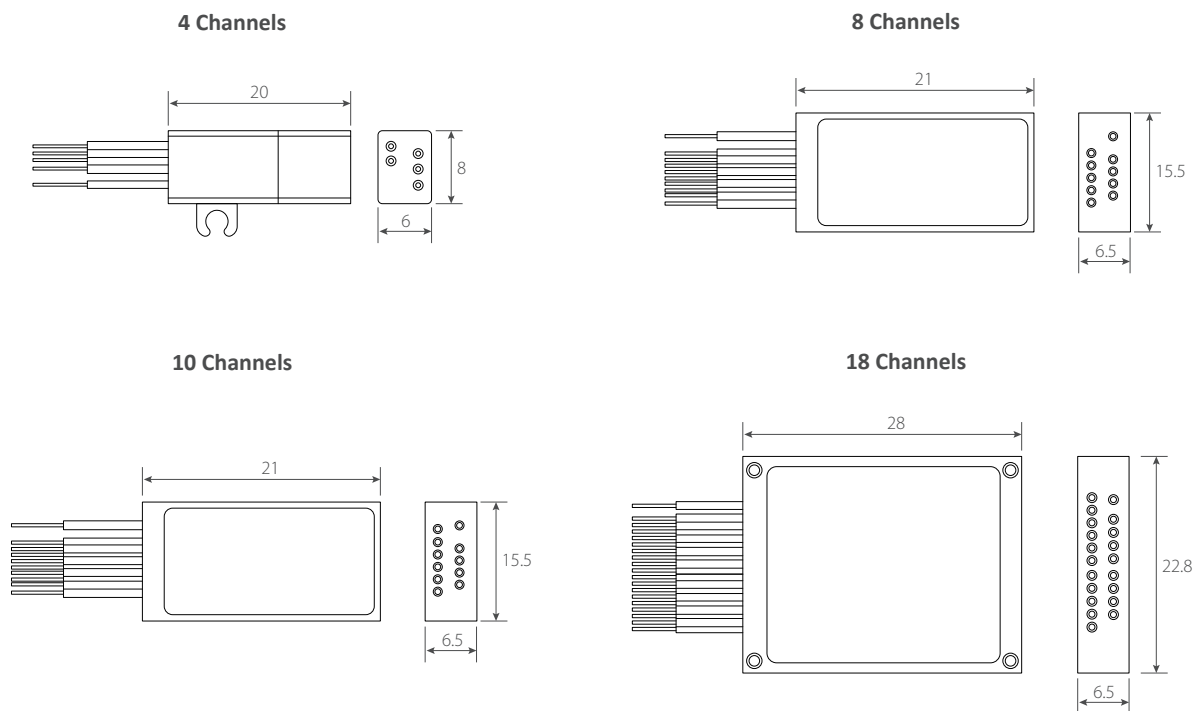

Unit: mm

## Parameter Specifications

	4 Channels	8 Channels	10 Channels	18 Channels
Insertion Loss	≤1.20dB	≤1.50dB	≤1.70dB	≤2.00dB
Ripple	≤0.30dB	≤0.30dB	≤0.40dB	≤0.50dB
Polarization Dependent Loss	≤0.15dB	≤0.15dB	≤0.15tdB	≤0.15dB
Channel Center Wavelengths	1271/ 1291/ 1311/ 1331/ 1351/ 1371/ 1391/ 1411/ 1431/ 1451/ 1471/ 1491/ 1511/ 1531/ 1551/ 1571/ 1591/ 1611nm			
Channel Spacing	20	20	20	20
Channel Passband	$\lambda_c \pm 6.5\text{nm}$ (Min.)	$\lambda_c \pm 6.5\text{nm}$ (Min.)	$\lambda_c \pm 6.5\text{nm}$ (Min.)	$\lambda_c \pm 6.5\text{nm}$ (Min.)
Isolation-Adjacent	≥30dB	≥30dB	≥30dB	≥30dB
Isolation-Non-adjacent	≥40dB	≥40dB	≥40dB	≥40dB
Directivity	≥50dB	≥50dB	≥50dB	≥50dB
Return Loss	≥50dB	≥50dB	≥50dB	≥50dB

Note:  
The above parameters do not include a connector,  
which is less than 0.2dB for a pair of connector.

<b>Operating Conditions</b>	<b>4 Channels</b>	<b>8 Channels</b>	<b>10 Channels</b>	<b>18 Channels</b>
Maximum Power Handling	500mW	500mW	500mW	500mW
Operating Temperature	-5°C ~ +70°C	-5°C ~ +70°C	-5°C ~ +70°C	-5°C ~ +70°C
Storage Temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Operation Humidity	5% to 95%	5% to 95%	5% to 95%	5% to 95%
	Relative Humidity	Relative Humidity	Relative Humidity	Relative Humidity



**OptiWorks, Inc.**

47211 Bayside Parkway, Fremont, CA 94538, USA  
Phone +1 510 438 4560  
sales@optiworks.com

**OptiWorks (Kunshan) Co., Ltd.**

No. 168, Nanhe Rd., Kunshan Economic & Technology  
Development Zone, Kunshan City, Jiangsu 215300, China  
Phone +86 512 5763 0863  
contact@optiworks.com

**OptiWorks (Shanghai) Co., Ltd.**

Room 810-811, Changchun Business Building,  
No. 953 Qinzhou North Road, Shanghai 200233, China  
Phone +86 021 6485 8787  
contact@optiworks.com